



## ThinLine II Reader

125 kHz Proximity

Low Profile Proximity Card Reader • 5395 (Wiegand) 5398 (Clock-and-Data)



ACCESS reliability.



### Application

Providing performance and reliability, HID's attractive, unobtrusive ThinLine proximity card reader is housed in a two-piece, weatherproof secure potted enclosure.

### Features

- Easily installed and maintained with the use of replaceable covers.
- Available with a Wiegand or Clock-and-Data interface.
- Provides high reliability, consistent read range and low power consumption.
- Features include multicolor LED and internal control or host control of the LED and beeper.
- Mounts directly on metal with minimal impact on the read range performance.
- Aesthetic design available in two cover designs and four colors to match any décor.
- Includes multilingual installation manual.

BUSINESS

SCHOOLS

STRATA

GOVERNMENT



**1300 23 55 26 (1300 BELLBOND)**

90 Calder Rd, Rydalmere, 2116

admin@bellbond.com.au www.bellbond.com.au

Master Licence No.405 287 556

AVCO Technologies PTY LTD ACN 003 620 200 ABN 61 003 620 200




## Features

## Specifications

- Mounting** Mounts on a single-gang electrical box for easy installation. Mounts directly on metal with minimal impact on read range performance.
- Audiovisual Indication** A red LED flashes green and the beeper sounds when reader is presented with a proximity card. The multicolor LED and beeper can also be controlled individually by the host system.
- Diagnostics** On reader power-up, an internal self-test routine checks and verifies the setup configuration, determines the internal or external control of the LED and beeper and initializes reader operation. An additional external loop-back test allows for the reader outputs and inputs to be verified without the use of additional test equipment.
- Indoor/outdoor Design** Sealed in a rugged, weatherized polycarbonate enclosure designed to withstand harsh environments, providing reliable performance and a high degree of vandal resistance.
- Easily Interfaced** Wiegand output model interfaces with all existing Wiegand protocol access control systems. Clock-and-Data (magnetic stripe) model interfaces with most systems that accept magnetic stripe readers.
- Security** Recognizes card formats up to 85 bits, with over 137 billion unique codes.
- Warranty** Lifetime warranty against defects in materials and workmanship (see complete sales policy for details).
- Part Numbers** Base Part No.: 5395 Wiegand interface  
Base Part No.: 5398 Clock-and-Data interface  
Description: Tri-State LED, internal beeper on
- Options**
  - CLASSIC series cover in white, beige, charcoal gray or black (or)
  - Designer series cover in white, wave blue, charcoal gray or black
  - LED and beeper operation

(Please see "How to Order Guide" for a description of the options and associated part numbers.)

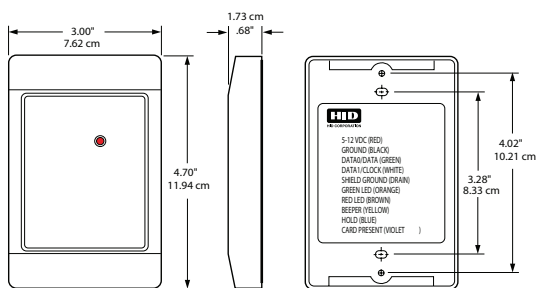

- Typical Maximum\* Read Range**  
 ProxCard<sup>®</sup> II card - up to 5.5" (14 cm)  
 ISOProx<sup>®</sup> II card - up to 5" (12.7 cm)  
 DuoProx<sup>®</sup> II card - up to 5" (12.7 cm)  
 Smart ISO<sup>®</sup> / DuoProx<sup>®</sup> cards - up to 5" (12.7 cm)  
 Proximity & MIFARE<sup>®</sup> card - up to 5" (12.7 cm)  
 ProxCard<sup>®</sup> Plus card - up to 1.5" (3.8 cm)  
 ProxKey<sup>®</sup> II keyfob - up to 2" (5.1 cm)  
 MicroProx<sup>®</sup> Tag - up to 3" (7.6 cm)  
 \*Depending on local installation conditions.

- Dimensions :**  
4.70" x 3.00" x 0.68"  
(11.9 x 7.6 x 1.7 cm)
- Material:** Polycarbonate UL 94
- Power supply:**  
5-16 VDC  
Linear power supplies are recommended.
- Current requirements:**  
Average: 30 mA (5 VDC); 20 mA (12 VDC)  
Peak: 110 mA (5 VDC); 115 mA (12 VDC)

- Operating temperature:**  
-22° to 150° F (-30° to 65° C)
- Operating humidity:**  
0-95% relative humidity non-condensing

- Weight:**  
3.3 oz. (94 gm)
- Transmit frequency:** 125 kHz
- Excite frequency:** 125 kHz

- Cable distance:**  
Wiegand interface: 500 feet (150 m)  
Clock-and-data interface: 50 feet (15 m)  
Recommended cable is ALPHA 1295 (22 AWG) 5 conductor minimum stranded with overall shield or equivalent. Additional conductors may be required for LED or beeper control.

- Certifications:**  
 Canada/UL 294 Listed  
 FCC Certification, United States  
 Canada Certification  
 EU and CB Scheme Electrical Safety (EN60950 and IEC60950  
 ITE Electrical Safety)  
 Fifteen EU Countries under the R&TTE Directive (EN 300 330  
 - SRD, and ETS 300 683 - EMC)  
 CE Mark  
 Australia C-Tick, New Zealand  
 Taiwan, China

BUSINESS

SCHOOLS

STRATA

GOVERNMENT



**1300 23 55 26 (1300 BELLBOND)**

90 Calder Rd, Rydalmere, 2116

admin@bellbond.com.au www.bellbond.com.au

Master Licence No.405 287 556

AVCO Technologies PTY LTD ACN 003 620 200 ABN 61 003 620 200