




## PHYSICAL ACCESS SOLUTIONS

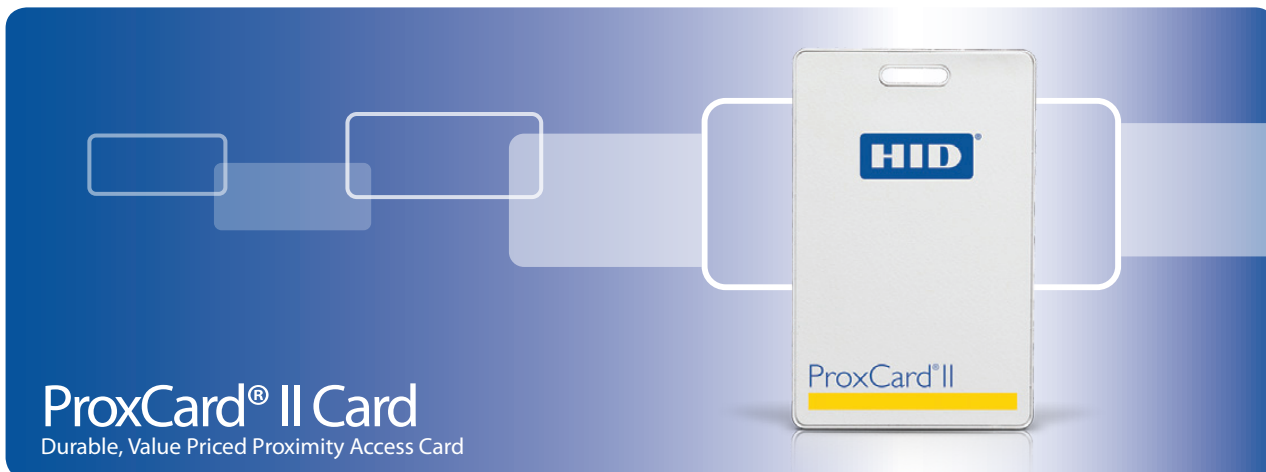

THE RF-PROGRAMMABLE PROXCARD® II PROXIMITY ACCESS CARD IS THE INDUSTRY CHOICE FOR A COSTEFFECTIVE SOLUTION TO PROXIMITY ACCESS CONTROL.

### Features:

Offers universal compatibility with all HID proximity readers.

Provides durable packaging and consistent read range.

Provides an external number for easy identification and control.

Supports formats up to 85 bits, with over 137 billion codes.

Custom pre-printed artwork available.

A PVC overlay allows for on-site photo ID using most direct image printers.

Using HID's ProxProgrammer®, card vendors can ship ProxCard II proximity cards, custom programmed to their customers' requirements, from their own inventory. Enables smaller order quantities and overnight delivery.

**Proven, Reliable Technology** – Offers extremely consistent read range. Unaffected by body shielding or variable environmental conditions, even when close to keys and coins.

**Convenient To Use** – Can fit into a wallet or purse. Use with a strap and clip as a photo ID badge.

**Cross-reference** – A cross-reference list correlating the external card number and the programmed ID number is provided for easy system administration.

**Security** – Offers over 137 billion unique codes.

**Long Life** – Passive, no-battery design allows for an infinite number of reads.

**Durability** – Strong, flexible and resistant to cracking and breaking.

**Companion Products**– 1321 Photo pouch overlay

1324 PVC Direct print overlay

The RF-programmable ProxCard® II proximity access card is the industry choice for a cost-effective solution to proximity access control.

BUSINESS

SCHOOLS

STRATA

GOVERNMENT



**1300 23 55 26 (1300 BELLBOND)**

90 Calder Rd, Rydalmere, 2116

admin@bellbond.com.au www.bellbond.com.au

Master Licence No.405 287 556


AVCO Technologies PTY LTD ACN 003 620 200 ABN 61 003 620 200



SPECIFICATIONS



ProxCards® II Card

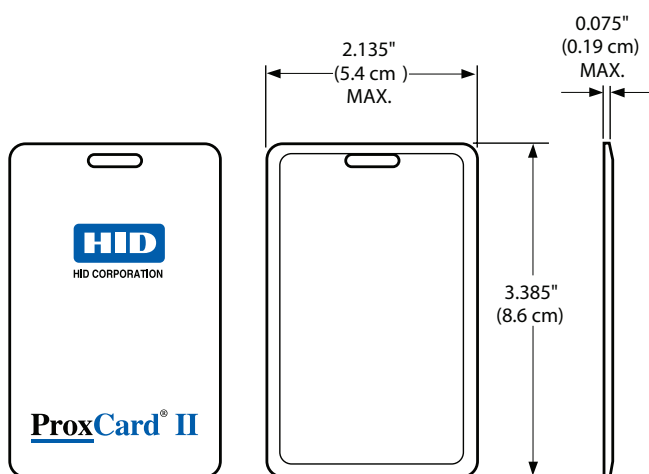

ProxCards II Artwork (front)

All dimensions are nominal

Base Part Number	1326
Typical Maximum* Read Range	ProxPoint® Plus reader-up to 3" (7.5 cm) MiniProx® reader-up to 5.5" (14 cm) ThinLine® II reader-up to 5.5" (14 cm) ProxPro® reader-up to 8" (20 cm) ProxPro® II reader-up to 9" (22.9 cm) Prox80™-up to 5.5" (14 cm) MaxiProx® reader-up to 24" (60 cm)
Dimensions	2.135" x 3.385" x 0.075" MAX. (5.4 x 8.6 x 0.19 cm)
Operating Temperature	-50° to 160° F (-45° to 70° C)
Options	External card numbering (inkjet only; no laser engraving) Custom artwork (text or graphics)
Weight	0.24 oz. (6.8 gm)
Warranty	Lifetime

NOTES:  
\*Dependent on local installation conditions.

BUSINESS

SCHOOLS

STRATA

GOVERNMENT



**1300 23 55 26 (1300 BELLBOND)**

90 Calder Rd, Rydalmere, 2116

admin@bellbond.com.au www.bellbond.com.au

Master Licence No.405 287 556

AVCO Technologies PTY LTD ACN 003 620 200 ABN 61 003 620 200